

Cambridge *Xpress*

Most efficient **laminated shingle**
in the world



Cambridge Xpress,
express your individuality

Cambridge *Xpress*

Cambridge *Xpress*

Your **benefits**

- Most efficient **laminated shingle** in the world: **larger shingle size** (more coverage than any standard shingle) and very quick to install
- Extra large nailing area, known as the “**Cambridge Xpress Lane**”, for improved nailing shingle performance (especially on steep roofs) and **faster** implementation of the shingles
- **Double-layer** shingle with an dimensional wood shake look in natural tones and colours
- Best choice for the home-owner with its water-shedding and **weather-resistant** construction
- Excellent solution for **renovation** projects


Get the **IKO**-advantage:



larger shingle size =
more coverage on your roof with

cambridge
Xpress



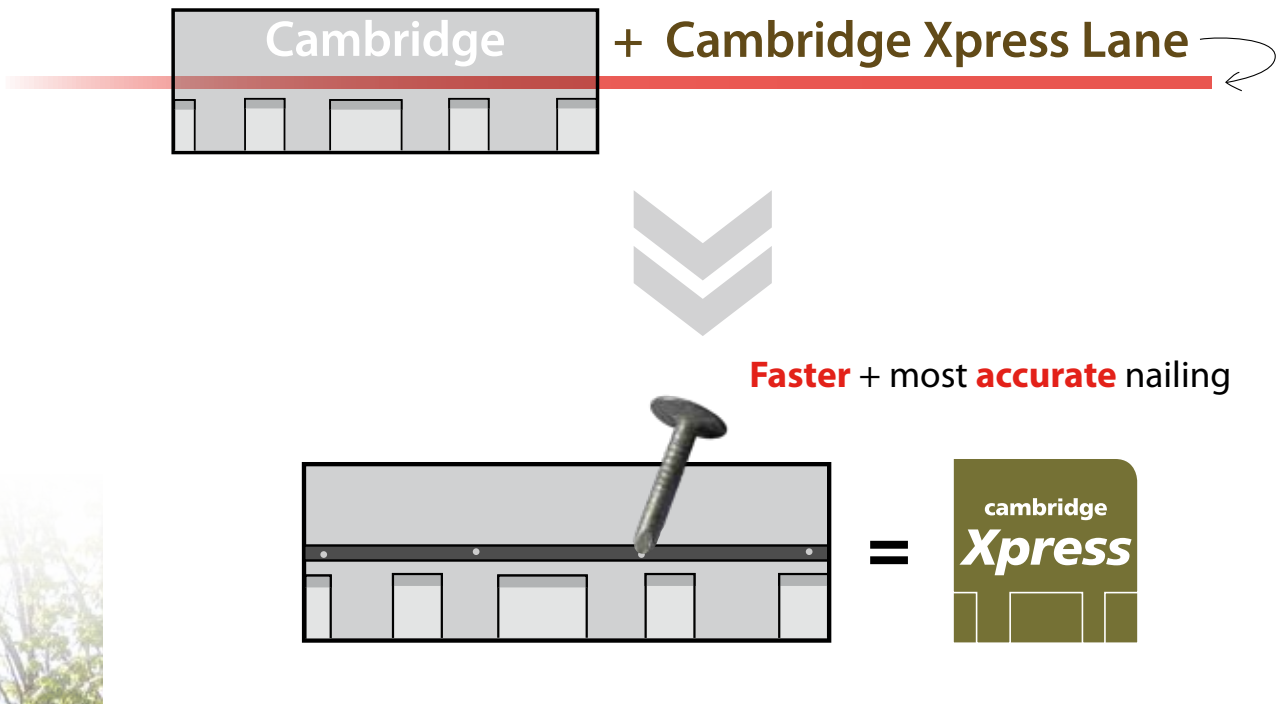

Width* (EN 544)	1038 mm (± 3)
Height (EN 544)	349 mm (± 3)
Weight	± 10,75 kg/m²
Coverage/bundle	2,17 m²
Shingles/bundle	14
Bundles/pallet	66

Granule adhesion (EN 12039)	max. 1,2 g
Tensile strength (width)* (EN 12311-1)	850 N/50 mm
Tensile strength (height)* (EN 12311-1)	550 N/50 mm
Elongation width* (EN 12311-1)	3,50 %
Elongation height* (EN 12311-1)	3,50 %
Nails shank tear resistance* (EN 12311-1)	140 N

External fire performance (EN 13501-5)	Broof(t1), Broof(t3)
Reaction to fire (EN 13501-1)	Class E

(* Registered average values)

Colours



- 43

Amazon Green
- 49

Earthtone Cedar
- 50

Harvard Slate
- 51

Eastern Grey
- 52

Dual Black
- 53

Autumn Brown
- 54

Aged redwood
- 55

Riviera Red



Application instructions

➤ Nailing & sealing


Proper fastening is essential for a good roof.

- Drive the nails straight so that the nail heads are flush with, but not cutting into the shingle surface
- During cold weather application extra cement must be added in the same manner
- In high wind areas Cambridge Xpress should be cemented for at least the top five courses of the roof
- Plastic cement should be applied in amounts no greater than 25 mm in diameter and used sparingly
- Nail positioning :
 - Use 4 nails per shingle placed in the “Cambridge Xpress lane”, approximately 2,5 cm and 33 cm in from each end
 - Nail position for laminated shingles: **XPRESS LANE = NAILING LANE** for more accurate nailing




Note:

Steep slope application (> 60°) or high wind areas require extra nails and hand sealing with IKO Shingle Stick.

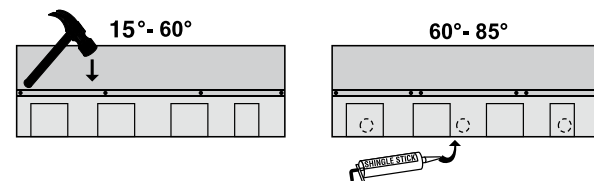

➤ Starter Strip



You need a Superglass shingle as a starterstrip.

- Prepare the starter strip by cutting off the shingle tabs of a Superglass shingle along a line level with the top of the cut-outs
- Begin the starter strip by cutting the strip half a tab short so that its joints will not line up with the joints of the first course of shingles



- The starter strip should overhang the eaves by 6-10 mm and the rakes where applicable (1)

➤ First courses & application procedure

First course (2):

- Start with a complete shingle applied flush with the starter strip at rake and eaves

Second course (3):

Cut off 25 cm from the left end of the Cambridge Xpress shingle and start at the rake end.


Third and succeeding courses (4):

- Start the third course with a shingle from which 50 cm has been cut
- Cut off an additional 25 cm for each succeeding course
- For maximum protection against wind driven rain, cement the shingle at the rake edges
- Continue across the roof with full shingles



➤ Hips & Ridges

- Cut Superglass 3Tab shingles into individual pieces by dividing the shingle at the cut-outs
- Bend each piece over the hip or ridge, and nail 16 cm above the tab edge, 2,5 cm from each side, exposing each piece 14 cm to the weather
- The final cap shingle and exposed nails should be glued with Shingle Stick
- In cold weather warm the shingle before bending

Starterstrip for **Cambridge Xpress** roof (21 m/bdl)

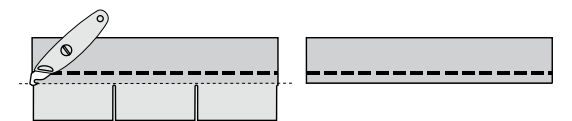

Ridge shingle for **Cambridge Xpress** (9 m/bdl)

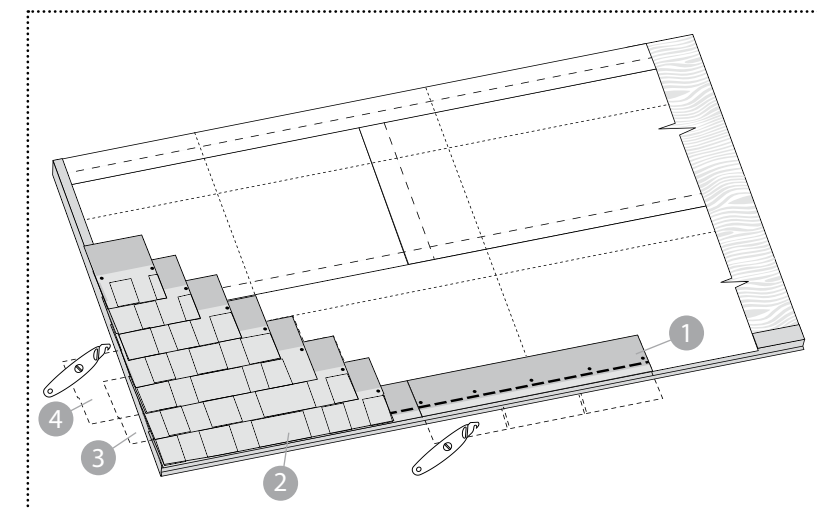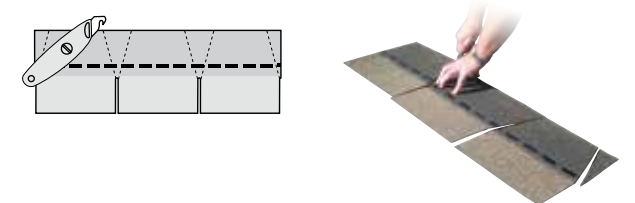

cambridge
Xpress

www.iko.eu



Dealer:

IKO Sales International NV

Truibroek 74

3945 Ham • Belgium

T +32 (0) 11/34 01 20

F +32 (0) 11/34 01 29

E residential.europe@iko.com

www.iko.eu

