




LAMINATED SHINGELS • Self-adhesive laminated shingle



Cambridge Xtreme 9,5° - 50 | Harvard slate

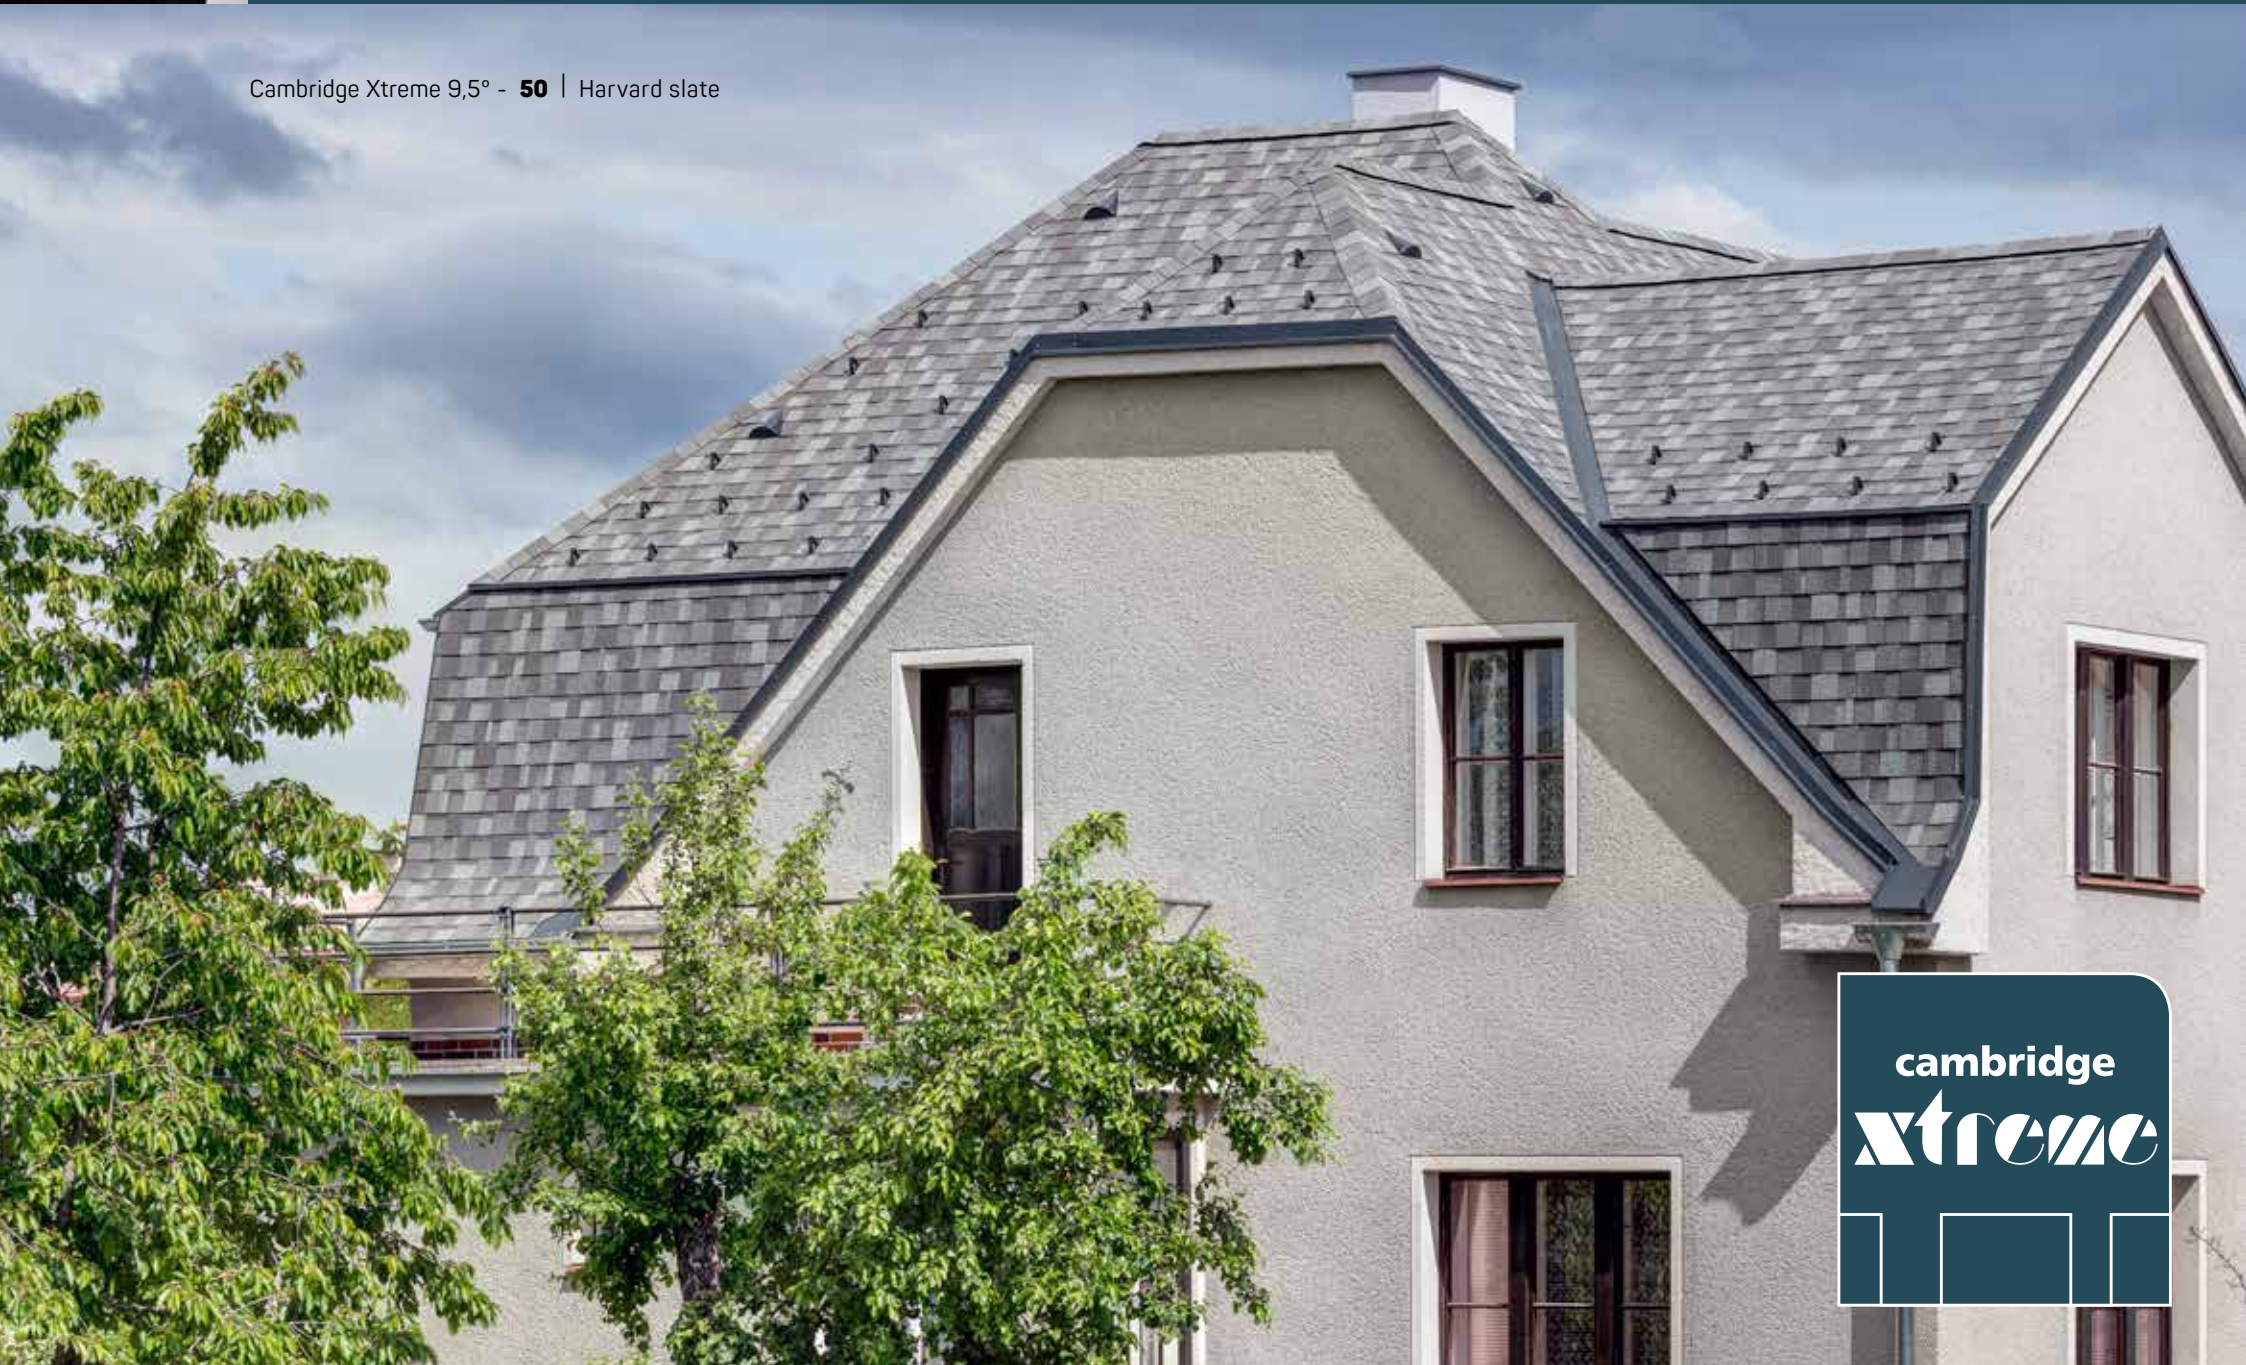




LAMINATED SHINGELS • Self-adhesive laminated shingle

Your Benefits:

- Xtreme slope: $\geq 9,5^\circ$ (!) - $\leq 90^\circ$
- Xtreme resistance to high wind & heavy rain: tested and approved
- Xtreme unique: the world's first self-adhesive laminated shingle
- Xtreme European quality
- Xtreme shingle guarantee: 15 years full Platinum guarantee & 30 years total guarantee



Cambridge Xtreme 9,5°

Width* (EN 544)	1038 mm (± 3)
Height (EN 544)	349 mm (± 3)
Weight/m ² covered	$\pm 10,95$ kg/m ²
Coverage/bundle	2,17 m ²
Shingels/bundle	14
Bundles/pallet	66

Granule adhesion (EN 12039)	max. 1,2 g
Tensile strength (width)* (EN 12311-1)	850 N/50 mm
Tensile strength (height)* (EN 12311-1)	550 N/50 mm
Elongation (width)* (EN 12311-1)	3,50 %
Elongation (height)* (EN 12311-1)	3,50 %
Nails shank tear resistance* (EN 12310-1)	140 N
Wind resistance (tunnel test: slope 25°)	up to 200 km/h

External fire performance (EN 13501-5)	$B_{\text{roof}}(t_1); B_{\text{roof}}(t_3)$
Reaction to fire (EN 13501-1)	Class E

* Registered average values



IKO Sales International NV

Truibroek 74 • 3945 Ham • Belgium
T +32 (0)11 34 01 20 • F +32 (0)11 34 01 30
E residential.europe@iko.com • www.iko.eu



The information is subject to change without prior notice.
Consult our shingle overview leaflet or website www.iko.eu for colour availability
of the products and application instructions.