



ACCESSORIES • Valleys



Your Benefits:

- Our Armourvalley rolls are 100% compatible with IKO shingles thanks to their matching colours.
- Quick and easy installation.

Valleys



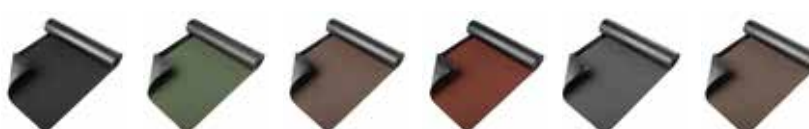
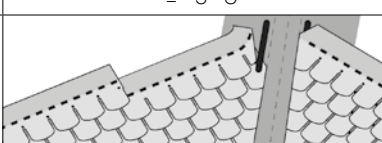

ACCESSORIES • Valleys

- **IKO Armourvalley®**

is a high quality APP modified roll finished with ceramic-coated granules that perfectly match the colours of IKO shingles. The special features make it ideal for the specific needs of roof valleys: strength, flexibility and aesthetics. It can also be used for low slope roof areas adjacent to shingles.

- **IKO Base®**

is a underlay for IKO Armourvalley, when used on low slope roof areas (<15°) this roll must be applied with a good mechanical fastening (nail or screws every 20 cm in all directions). Afterwards the IKO Armourvalley must be fully torched on it.

Armourvalley®		Base®
		
Weight/roll*	38,8 kg	25,9 kg
Thickness	4 mm	2,1 mm
Dimensions (length x width)	7,5 m x 1m	12 m x 1 m
Surface	7,5 m²	12 m²
Rolls/pallet	25	24
Tensile strength (longitudinal)* (EN 12311-1)	650 N/50 mm	440 N/50 mm
Tensile strength (transversal)* (EN 12311-1)	400 N/50 mm	300 N/50 mm
Elongation (longitudinal)* (EN 12311-1)	20 %	20 %
Elongation (transversal)* (EN 12311-1)	20 %	20 %
Heat resistance lower surface (EN 1110)	120 °C	120 °C
Cold flex lower surface (EN 1109)	≤ -5 °C	≤ -5 °C
		

(* Registered average values)



IKO Sales International NV

Truibroek 74 · 3945 Tessenderlo-Ham · Belgium

T +32 (0)11 34 01 20 · F +32 (0)11 34 01 30

E residential.europe@iko.com · www.iko.eu



The information is subject to change without prior notice.

Consult our shingle overview leaflet or website www.iko.eu for colour availability of the products and application instructions.